



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>7</sup> :</b>  <b>B60R 19/02</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/46074</b>  <b>(43) International Publication Date:</b> 10 August 2000 (10.08.00)
<b>(21) International Application Number:</b> PCT/NO00/00035  <b>(22) International Filing Date:</b> 3 February 2000 (03.02.00)  <b>(30) Priority Data:</b> 19990503                      3 February 1999 (03.02.99)                      NO  <b>(71) Applicant (for all designated States except US):</b> NORSK HYDRO ASA [NO/NO]; N-0240 Oslo (NO).  <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> HØILAND, Thorbjørn [NO/NO]; Bassengv. 7, N-2830 Raufoss (NO). PEDERSEN, Roald, Helland [NO/NO]; Kopperudbakken 7, N-2818 Gjøvik (NO). STJERN, Tor, Arne [NO/NO]; Vildåsv. 69, N-2830 Raufoss (NO).  <b>(74) Agent:</b> RICANEK, Ivan; Norsk Hydro ASA, N-0240 Oslo (NO).		<b>(81) Designated States:</b> AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> BUMPER BEAM AND METHOD OF MANUFACTURING THE SAME		
<b>(57) Abstract</b>		
<p>A bumper beam exhibiting integral attachment parts (3) acting as direct interface between the vehicle structure and the beam is provided by a novel manufacturing method where selected areas of a member (1) are subjected to reshaping along its all three main axes allowing for a new one-piece bumper beam construction integrating also energy absorbing crash box member (5).</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## **"Bumper beam and method of manufacturing the same"**

The present invention relates to a bumper beam, more particularly an integrated bumper beam of simplified design for vehicles and a method of manufacturing the same.

Different designs of an open bumper beam of generally U- or hat-shaped configuration with laterally extending fastening flanges are presently known manufactured both from steel and Al-alloys material by conventional reshaping of blank or sheet.

However, several disadvantages inherent in the hitherto applied manufacturing/shaping methods characterized the presently known bumper beams. Generally such open beams exhibit low stability with regard to local buckling and require rather thick (and heavy) walls in order to achieve required crash performance (energy absorption). This means increased material costs and weight of the components due to a necessity to reinforce the beam incorporating internal strengthening walls and thus causing a higher fuel consumption for the vehicle.

Furthermore, the conventional shaping methods do not allow for a more flexible design of beams such as incorporation of additional structural functions and/or attachment flexibility of the bumper beam to the structural frame of the vehicle.

It is therefore an object of the present invention to provide a novel method of manufacturing open bumper beams integrating additional function(s) of the bumper energy absorbing system, particularly an energy absorbing crash box.

Another object of the invention is to provide a novel open one-piece bumper beam resulting in reduced material consumption and waste material and bumper beams exhibiting improved crash performance and lower weight and assembling costs.

Still another object of the present invention is to provide a novel bumper beam allowing for a more flexible design of the beams, allowing direct assembling to the vehicle frame structure and simultaneously achieving a longest possible deformation distance to the vehicle space frame (side members of the frame).

These and other objects of the present invention are met by provision of a novel bumper beam as defined in the attached patent claim 1, the preferred embodiments of the beam as appears from the dependent claims 2-5 and a novel manufacturing method according to claim 6.

The invention will now be described in details by way of examples of preferred embodiments of the bumper beam in the following description referring to the attached drawings, Figs. 1-6, where

Figs. 1a,b show schematically in a perspective (partial) view the novel open bumper beam design as a front view and rear view, respectively,

Fig. 2 illustrates in a perspective fragmentary view the detail of attachment area,

Fig. 3 shows schematically in a top view the principle of integrating additional function(s) in a one-piece bumper beam, and

Figs. 4a,b,c,d illustrate schematically the flexibility of providing different connections between the beam and vehicle frame structure,

Figs. 5a,b,c show another preferred embodiment(s) of the bumper beam according to the present invention, and

Figs. 6a,b illustrates schematically in a perspective view a closed shape type of bumper provided according to the present invention.

Referring to Fig. 1, a novel bumper beam 1 according to the present invention is shown schematically in a perspective partial front view (Fig. 1a) as a half part of the beam divided by central line OY.

Starting from a conventionally provided U-shaped beam 2, either ready extruded or reshaped/rolled from a flat blank exhibiting a pair of laterally extending webs 21,22, the beam being exposed to a simultaneous reshaping along all three main axes during the forming operation, transfers in preselected areas of the beam, e.g. at both ends of the beam, into a novel manipulated beam configuration member 3. Thanks to the controlled material flow along all three axes new integrated parts laterally protruding beyond the extension of the original configuration of the webs 21,22 are provided in the reshaping operation. Such new integrated stiffening structural parts can represent an improved flexible attachment for the beam to the vehicle frame or even an integrated energy absorbing crash box member 5 as illustrated in Fig. 1b.

The flexibility of the attachment, thanks to the achieved local displacement and prolongation of the webs 21,22, ensures as shown in the Figures that apertures 23 provided for conventional fastening means as screws, bolts etc. (not shown) can be adjusted/-located at a higher/lower level (lateral adjustment) according to available space and/or configuration of the actual connected vehicle frame members.

Furthermore, other configurations and combinations of the apertures 23 than the shown one is facilitated, e.g. a scattered pattern in one or several rows (levels).

The extent of material flow resulting from the plastic reshaping during the forming operation due to the fact that the reshaping takes place in all three dimensions can be seen more clearly from Fig. 2 showing in an exploded fragmentary view how both the central to hat portion 11 of the beam and the laterally extending webs 21,22 are exposed to a forming operation. The excess of material provided in this way forms an integrated structural element member 3 extending laterally/protruding beyond the original flanges 21,22. This new integrated element 3 can advantageously be shaped and applied as an energy absorbing crash box 5 having an outer contour adapted/complying with the orientation of e.g. side member 7 as schematically shown in Fig. 3.

Apart from improving the local buckling resistance and increasing the crash energy absorption in thus reshaped localities, also increased stiffness is achieved thanks to the special reshaping of the material. Furthermore, the need for an extra (conventional) energy absorbing unit/member is eliminated.

Figs. 4a-d illustrate schematically a further advantage resulting from the novel reshaping manufacturing method according to the present invention - provision of elongated flanges 21,22 in the three-dimensional manipulated areas of the beam. As shown in Fig. 4a illustrating prior art only a limited part of the webs 21,22 is available to form attachment surfaces for connection(s)/flange(s) 25 with the longitudinal front/rear side member 7 of the vehicle frame.

Thanks to the flexible controlled material flow different types of attachments can be achieved, e.g. an overlap configuration of the joint 26 ensuring possibility of vertical fastening of the web 22 as shown in Fig. 4b, higher/longer attachment flanges 25 thanks to the surplus of material available after reshaping of the U-member 2 as depicted in Fig. 4c, or lateral displacement of the jointed attachment 27 as shown in Fig. 4d.

Figs. 5a,b,c illustrate schematically another preferred embodiment of the bumper beam according to the present invention. The essentially U-shaped member 2 is furthermore, additionally to the above described and illustrated three-dimensional reshaping deformation, subjected, at its respective ends 28, to a bending operation, resulting preferentially in an approximately 180° bend as shown in Fig. 5a being a schematical top view of the U-member 2.

The new achieved configuration of the end parts 25 of the U-shaped member 2 (shown in the Figures only as the right hand side of the member) is more clearly seen in Fig. 5b in a schematical perspective view.

In this way even more integral material of the beam is available to compensate for the actual (full) distance between a plastic cover of the bumper 1 (not shown in the Figures) and side members of the vehicle frame.

This is particularly useful when large amounts of energies are to be absorbed such as under high speed impacts, in heavy vehicles and in the front ends of vehicles.

Thus, the combination of reshaping and bending operation substantially increase the depth of the provided integral energy absorbing crash box member 5 as seen in Fig. 5c.

Still another variant of the novel integral bumper beam is illustrated in Figs. 6a,b, showing in a perspective view a bumper beam 1 comprising a closed shape member 2 being three dimensionally reshaped according to the present invention into the bumper beam incorporating combined attachment parts and crash box members 5.

Fig. 6a shows a bumper beam exhibiting variable cross-sectional configuration (sectional views a,b) resulting from the three-dimensional reshaping according to the present invention for an optimal weight/energy absorption performance ratio, thus allowing for a flexible design of the beam both with regard to available assembling space, visual impression/adaption to the vehicle design and last but not least improved energy absorbing characteristics of the bumper beam.

By 90° bending of the end parts of the closed shaped beam 2 a new cross-section c is achieved thanks to the special reshaping. No limitation with regard to the side length of the bumper beam is thus achieved. The integrated beam sides act at the same time as crash box members 5 offering also a longer path for energy absorption and a better control with deformation of the beam upon an impact since the integrated "joints" 6 act as an initiator of deformation of the crash boxes 5.

Fig. 6b illustrates schematically a variant of the bumper beam 1 where in corresponding matter, as shown in Figs. 5a,b,c covering the U-shaped based beam, the three-dimensional reshaping is conducted by a 180° bending operation providing integrated crash boxes 5.

The inherent advantages in applying a closed extruded shape compared to an open U-shaped member are higher stiffness and generally better energy absorbing characteristics.

The beam is preferentially three-dimensionally formed from an extruded light metal profile such as aluminium alloy and particularly heat treatable Al-alloys, but also other materials, e.g. steel is applicable.





Claims

1. Bumper beam exhibiting increased stability and crash energy absorption characteristics in defined areas/localities along its longitudinal extension,  
c h a r a c t e r i z e d i n t h a t  
a member (2) being locally subjected to reshaping along its (all) three main axes exhibits two or more areas having laterally extending protruding parts (3), said parts being an integral part of the member (2), interconnected by transfer areas of substantially unchanged cross-sectional configuration of the U-shaped member (2) and where the end parts of the member are bent up to 180° providing integrated crash box members (5).
2. Bumper beam according to claim 1,  
c h a r a c t e r i z e d i n t h a t  
the member (2) is provided with laterally extending webs (21,22,26) and where the reshaped webs act as flanges or attachment parts (3) connecting the bumper beam to the longitudinal side members (7) in a vehicle frame.
3. Bumper beam according to claim 1 or 2,  
c h a r a c t e r i z e d i n t h a t  
the member (2) is provided as an extruded close shaped or U-shaped member.
4. Bumper beam according to claim 1 or 2,  
c h a r a c t e r i z e d i n t h a t  
the (2) is fabricated from a blank material
5. Bumper beam according to one or more preceding claims,  
c h a r a c t e r i z e d i n t h a t  
the member (2) is made of heat treatable Al-alloy.

6. Method of manufacturing a bumper beam comprising steps of
  - provision of a substantially U-shaped or close shaped member (2) optionally provided with laterally extending flanges (21,22) by any conventional manufacturing method known per se,
  - imposing selected areas of the member (2) along its longitudinal extension to a forming operation by reshaping the member along its all three main axes, thereby
  - providing a controlled lateral material flow resulting in formation of laterally protruding parts (3), said parts being an integral part of the member (2).
  
7. Method of manufacturing a bumper beam according to claim 6,  
c h a r a c t e r i z e d i n t h a t  
additionally to the reshaping operations along its all three main axes the member's end parts (25) are bent up to 180°, providing an additional reinforcement/-stiffening of the resulting bumper beam and an increased height/depth in the attachment area (3) of the bumper (1), hereby providing integrated crash box members on (each) side of the beam.

1/5

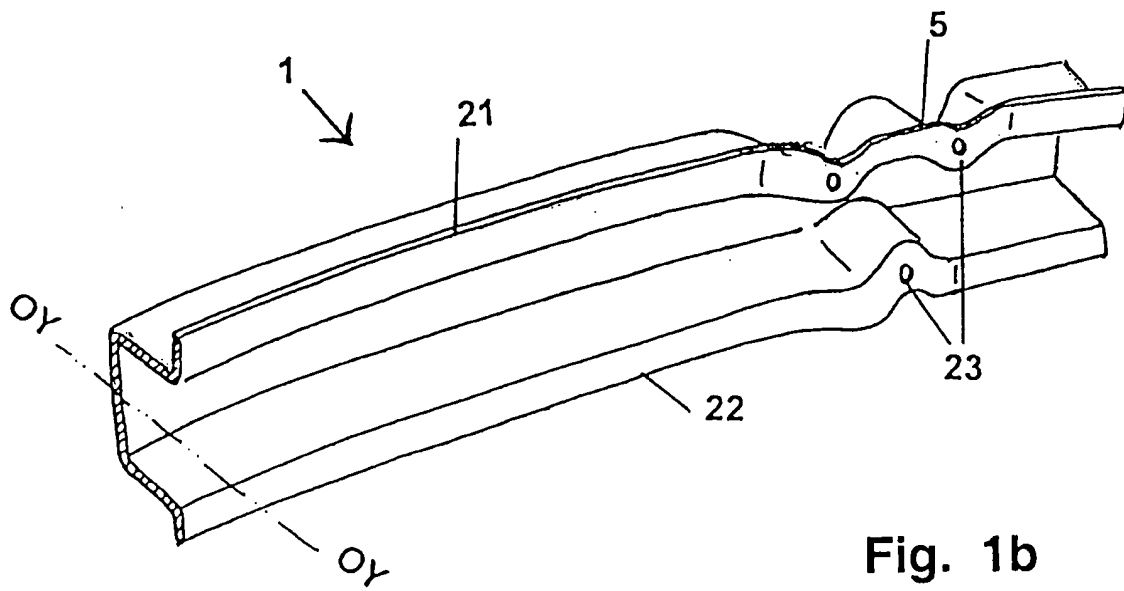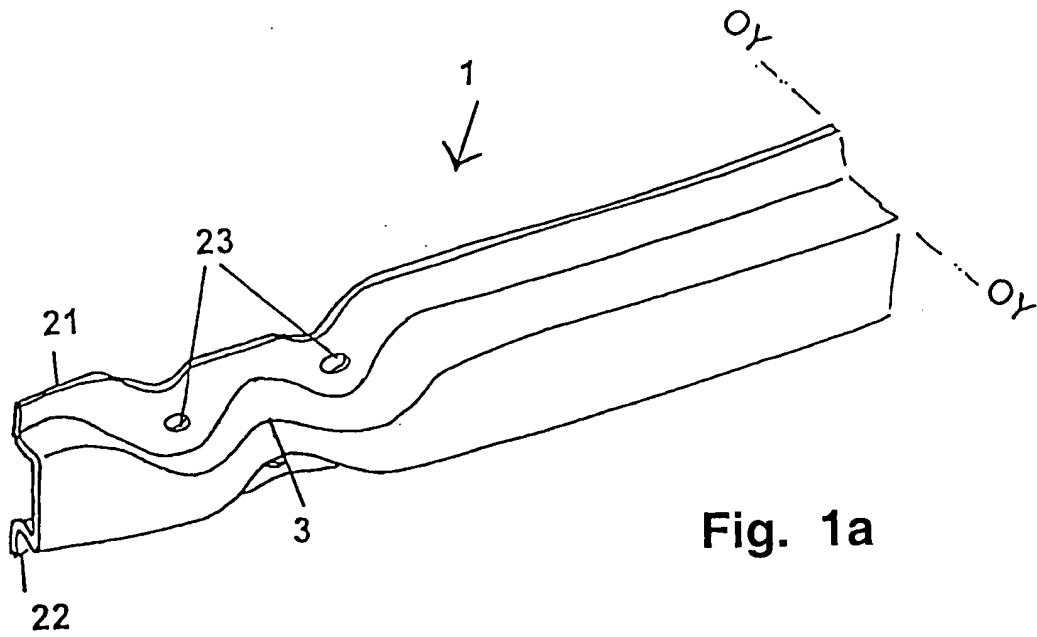

2/5

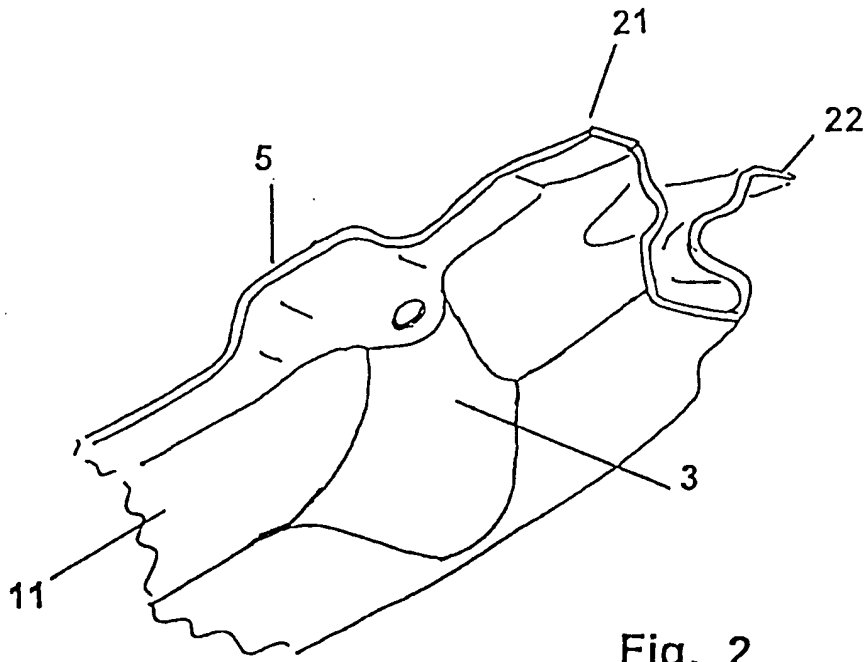


Fig. 2

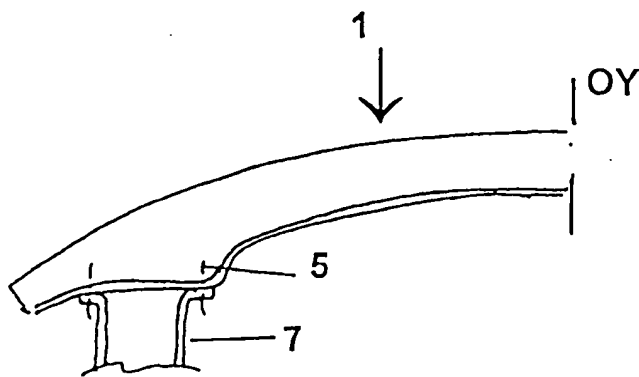


Fig. 3

3/5

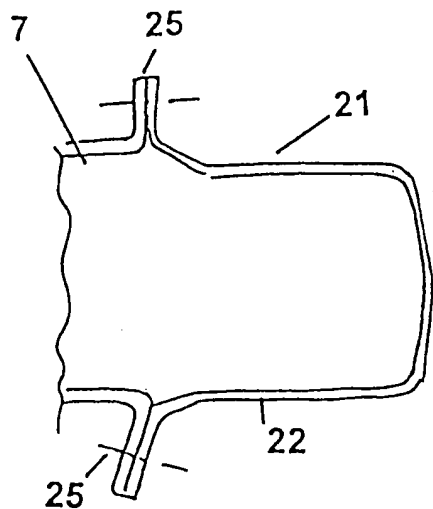


Fig. 4a

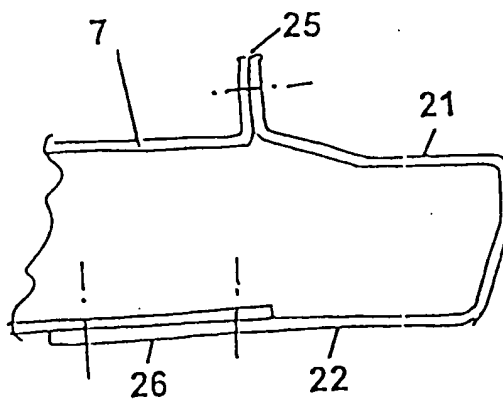


Fig. 4b

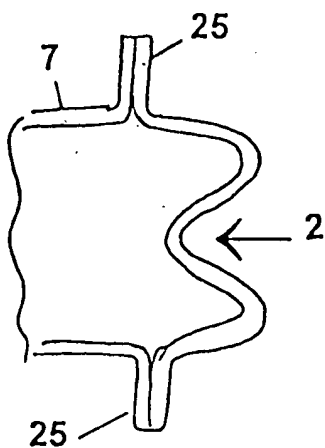


Fig. 4c




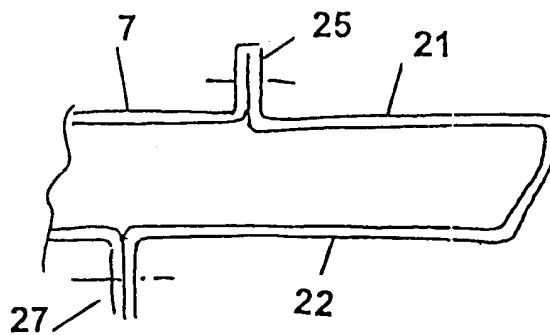


Fig. 4d

4/5

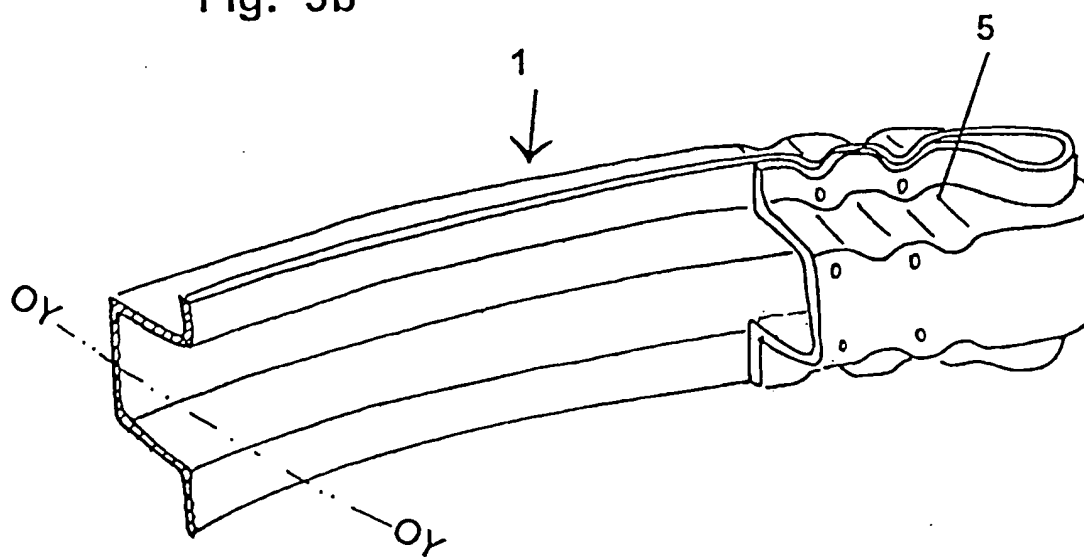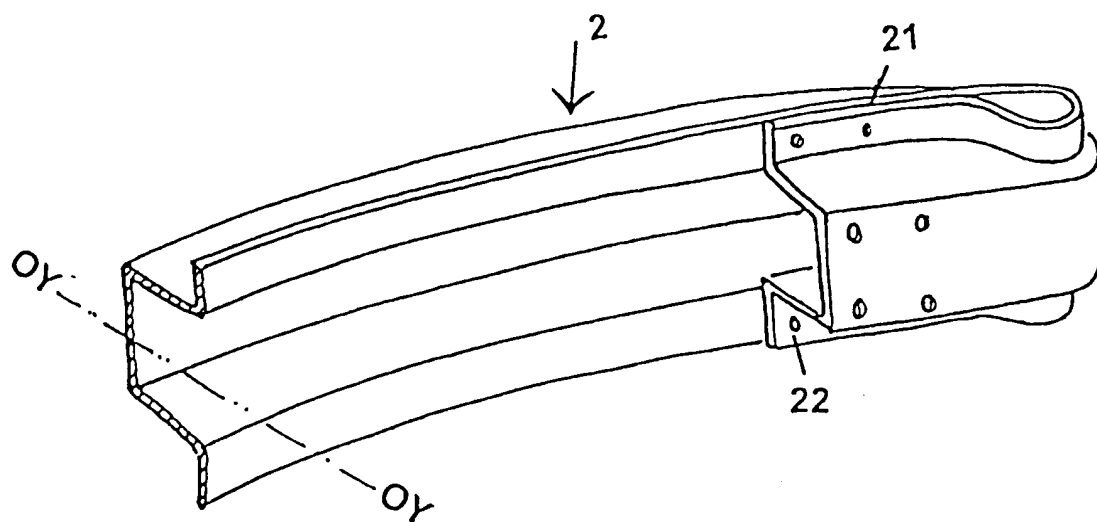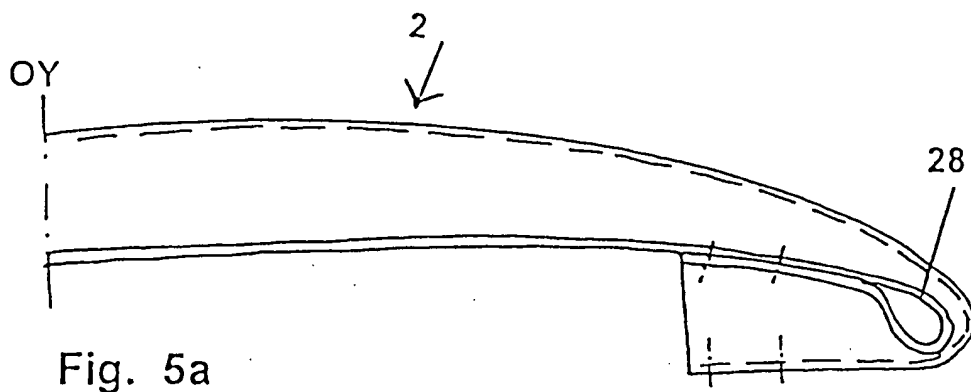

5/5

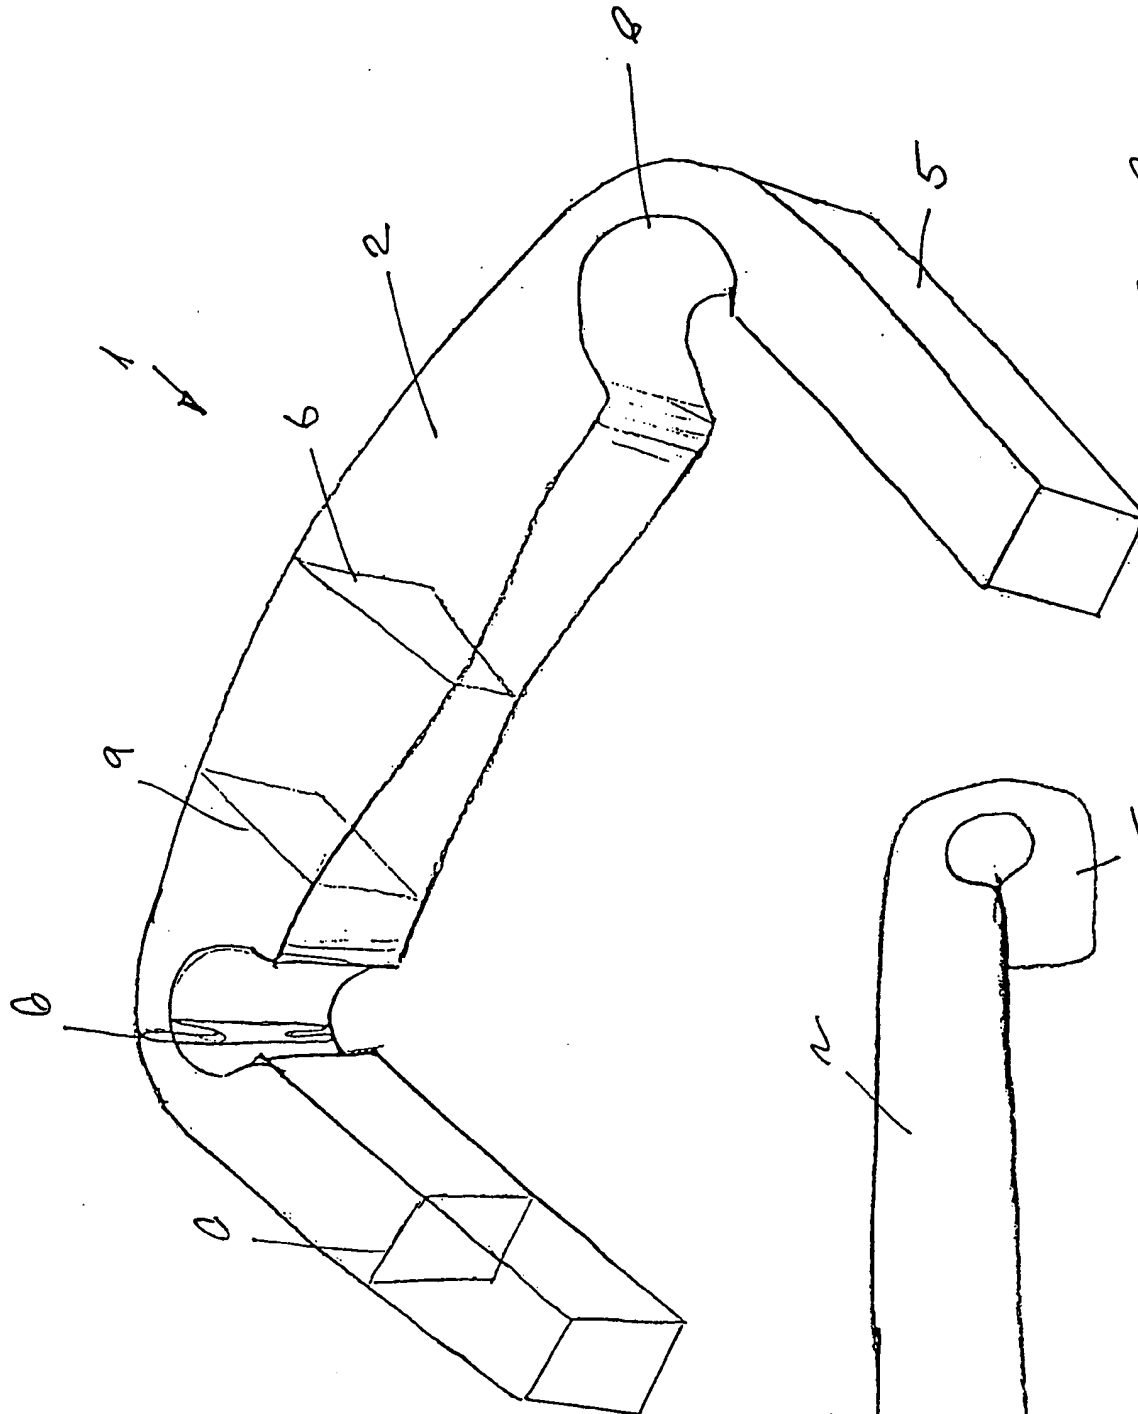


Fig. 6a

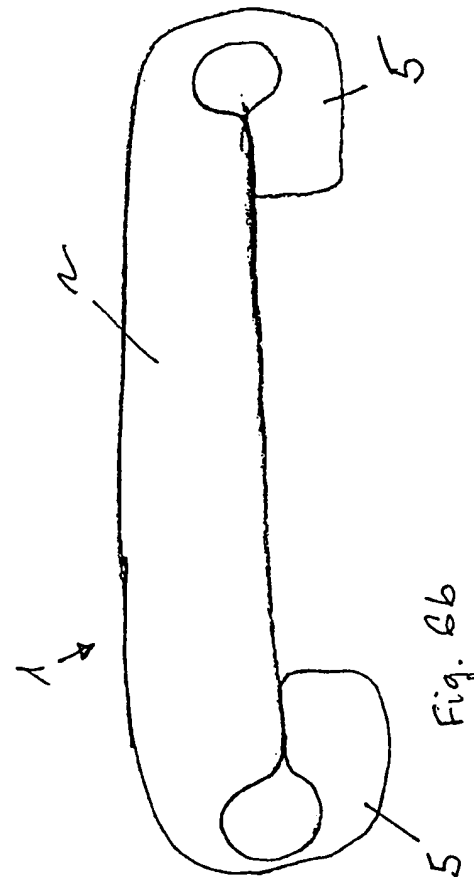


Fig. 6b

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 00/00035

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>  <b>IPC7: B60R 19/02</b> According to International Patent Classification (IPC) or to both national classification and IPC				
<b>B. FIELDS SEARCHED</b>  Minimum documentation searched (classification system followed by classification symbols)  <b>IPC7: B60R</b>  Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  <b>SE,DK,FI,NO classes as above</b>  Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)				
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
X	WO 9304897 A1 (NORSK HYDRO A.S.), 18 March 1993 (18.03.93), page 4, line 9 - line 20, figure 4, abstract	6		
A	--	1-5		
X	WO 9727082 A1 (HYDRO RAYFOSS AUTOMOTIVE A/S), 31 July 1997 (31.07.97), figure 1, abstract	6		
A	--	1-5		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.				
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top; border: none;">           * Special categories of cited documents            "A" document defining the general state of the art which is not considered to be of particular relevance            "E" earlier document but published on or after the international filing date            "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)            "O" document referring to an oral disclosure, use, exhibition or other means            "P" document published prior to the international filing date but later than the priority date claimed         </td> <td style="width: 50%; vertical-align: top; border: none;">           "I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention            "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone            "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art            "&amp;" document member of the same patent family         </td> </tr> </table>			* Special categories of cited documents "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family
* Special categories of cited documents "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family			
Date of the actual completion of the international search		Date of mailing of the international search report		
4 May 2000		10 -05- 2000		
Name and mailing address of the ISA Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. + 46 8 666 02 86		Authorized officer  Hans Nordström/LR Telephone No. + 46 8 782 25 00		



## INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 00/00035

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 19519110 A1 (RAUFOSS AUTOMOTIVE A/S), 21 December 1995 (21.12.95), figure 4, abstract	6
A	--	1-5
P,X	WO 9915365 A1 (NORSK HYDRO ASA), 1 April 1999 (01.04.99), page 6, figure 1, abstract	6
A	--	1-5
A	GB 1501991 A (RHEINSTAHL AKTIENGESELLSCHAFT), 22 February 1978 (22.02.78)	1,3,6,7
	-- -----	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

02/12/99

International application No.

PCT/NO 00/00035

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9304897 A1	18/03/93	CZ 282677 B	13/08/97
		CZ 9400482 A	18/05/94
		DE 69201797 D,T	16/11/95
		EP 0602138 A,B	22/06/94
		JP 6510256 T	17/11/94
		NO 173538 C	29/12/93
		NO 913528 D	00/00/00
		RU 2093401 C	20/10/97
		US 5577796 A	26/11/96
WO 9727082 A1	31/07/97	AU 1559897 A	20/08/97
		EP 0876265 A	11/11/98
		NO 960288 D	00/00/00
DE 19519110 A1	21/12/95	NO 941974 D	00/00/00
		NO 952047 A	28/11/95
WO 9915365 A1	01/04/99	AU 9284698 A	12/04/99
		NO 974375 A	23/03/99
US 1501991 A	22/02/78	NONE	

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**